

RSIC-1 ACOUSTIC ASSEMBLY

WALL ASSEMBLY

DIRECT FIX TO STEEL STUD




Toll Free 866-774-2100 • Telephone 503-649-7700


WS SS RAL 05-013 STC 58

CONSTRUCTION

- * 1 layer 5/8" Gypsum Board
- * 3-5/8" Steel Stud at 24" oc
- * R-19 Insulation 5.5"
- * RSIC-1 48" oc.
- * Drywall Furring Channel at 24" oc
- * 1 layer 5/8" Gypsum Board

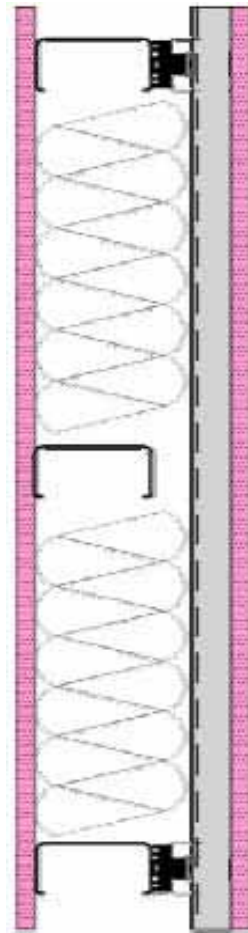

RAL Test 05-013

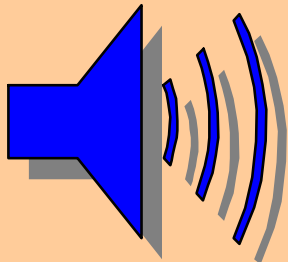

STC 58

1 hour fire rating



UL U419, U423

TEST REPORT

FOR: PAC International, Inc.
Aloha, OR

Sound Transmission Loss Test
RAL™-TL05-013

ON: WS-SS-FGB-RSIC-1-GB 1 x 1,
Resilient Sound Isolation Clip (RSIC-1) on
Steel Studs 24 Inches on Center, Insulated Cavity,
Single Layer 5/8 Inch Gypsum Board Direct and
Single Layer 5/8 Inch Gypsum Board on Clips

Page 1 of 4

CONDUCTED: 19 January 2005

RESULT: STC 58

TEST METHOD

Unless otherwise designated, the measurements reported below were made with all facilities and procedures in explicit conformity with the ASTM Designations E90-04 and E413-87, as well as other pertinent standards. Riverbank Acoustical Laboratories has been accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) for this test procedure. A description of the measuring technique is available separately.

DESCRIPTION OF THE SPECIMEN

The test specimen was designated by the manufacturer as WS-SS-FGB-RSIC-1-GB 1 x 1, Resilient Sound Isolation Clip (RSIC-1) on steel studs 24 inches on center, insulated cavity, single layer 5/8 inch gypsum board direct and single layer 5/8 inch gypsum board on clips. The overall dimensions of the specimen as measured were 4.27 m (168 in.) wide by 2.74 m (108 in.) high and 165 mm (6.5 in.) thick. The specimen was installed by the contractor directly into the laboratory's 2.74 m (9 ft) by 4.27 m (14 ft) wood-lined steel frame and was sealed on the periphery (both sides) with a dense mastic.

The test specimen was designated by the client as Wall System – Load bearing steel studs 3.625" x 20 ga. (0.033") x 1.625" flange, fiberglass batt insulation 6", RSIC-1, drywall furring channels 7/8" x 25 ga., gypsum board 5/8" 1 x 1, UL Design U419 & U423, STC – 58. A visual inspection verified the manufacturer's description of the specimen.

The description of the specimen was as follows: The wall consisted of 92 mm (3.625 in.) steel studs with 156 mm (6.25 in.) thick R-19 fiberglass batt insulation and a single layer of 16 mm (0.625 in.) Firecode 'C' Type X gypsum board on the receive side. RSIC-1 clips and drywall channel ("DWC") were used on the source side with a single layer of 16 mm (0.625 in.) Firecode 'C' Type X gypsum board. A more complete description follows.

This report shall not be reproduced except in full, without the written approval of RAL.

THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.

TEST REPORT

PAC International, Inc.

RAL™-TL05-013

19 January 2005

Page 2 of 4

Floor and Ceiling Runners: The two 20 gauge 92 mm (3.625 in.) wide by 4.27 m (168 in.) long steel runners were attached to the base and top of the test frame with 16 mm (1.25 in.) Type S bugle head drywall screws at 610 mm (24 in.) on centers.

Studs: The eight 92 mm (3.625 in.) wide by 2.74 m (107.75 in.) long 20 gauge load bearing steel studs were spaced on 610 mm (24 in.) centers. The end studs were attached to the frame with 16 mm (1.25 in.) type S bugle head drywall screws. The studs were attached to the floor and ceiling runners on both sides with 13 mm (0.5 in.) long S-12 pan head screws.

Insulation: The seven cavities formed by the runners and studs were friction fit with R-19 unfaced fiberglass insulation batts measuring 159 mm (6.25 in.) thick and 610 mm (24 in.) wide. Total weight of the insulation material as measured was 15 kg (33 lbs.).

RSIC-1 Clips and Drywall Channel: On the source side of the wall, PAC International RSIC-1 clips were attached to studs on 610 mm (24 in.) centers vertically and on 1.22 m (48 in.) centers horizontally. The bottom row of clips was installed 76 mm (3 in.) from the bottom of the test frame. Clips in subsequent rows were staggered 610 mm (24 in.) horizontally from adjacent rows. All RSIC-1 clips were attached to studs with a single #8, 64 mm (2.5 in.) long S-12 drywall screw. A total of thirty clips were used. The drywall channels were roll-formed furring channels which measured 22 mm (0.875 in.) deep by 65 mm (2.56 in.) wide. Six rows of channels were mounted to the RSIC clips and were overlapped 152 mm (6 in.) and double wire tied with 18 gauge tie wire as necessary.

Gypsum Board: A single layer of 16 mm (0.625 in.) USG 5/8" Firecode 'C' Type X gypsum board was applied vertically to the studs on the receive side of the wall and was fastened to the studs with 25 mm (1 in.) long Type S drywall screws on 406 mm (16 in.) centers. A single layer of 16 mm (0.625 in.) USG 5/8" Firecode 'C' Type X gypsum board was applied horizontally to the drywall channel on the source side of the wall and was fastened to the drywall channel with 25 mm (1 in.) long Type S drywall screws on 406 mm (16 in.) centers. Total weight of the gypsum board as measured was 288 kg (635 lbs.). All joints and screw heads were sealed using tape and all purpose joint compound.

The weight of the specimen as measured was 378.9 kg (835.25 lbs.), an average of 32.4 kg/m² (6.6 lbs/ft²). The transmission area used in the calculations was 11.7 m² (126 ft²). The source and receiving room temperatures at the time of the test were 21±2°C (70±3°F) and 56±3% relative humidity. The source and receive reverberation room volumes were 178 m³ (6,297 ft³) and 177 m³ (6,254 ft³), respectively.

This report shall not be reproduced except in full, without the written approval of RAL.

THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.

RIVERBANK ACOUSTICAL LABORATORIES

1512 S. BATAVIA AVENUE
GENEVA, ILLINOIS 60134

Alion Science and Technology

630/232-0104
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

TEST REPORT

PAC International, Inc.

RAL™-TL05-013

19 January 2005

Page 3 of 4

TEST RESULTS

Sound transmission loss values are tabulated at the eighteen standard frequencies. A graphic presentation of the data and additional information appear on the following pages. The precision of the TL test data is within the limits set by the ASTM Standard E90-02.

<u>FREQ.</u>	<u>T.L.</u>	<u>C.L.</u>	<u>DEF.</u>	<u>FREQ.</u>	<u>T.L.</u>	<u>C.L.</u>	<u>DEF.</u>
100	25	0.76		800	62	0.16	
125	35	0.58	7	1000	63	0.11	
160	39	0.48	6	1250	64	0.17	
200	43	0.47	5	1600	63	0.14	
250	49	0.35	2	2000	56	0.10	6
315	54	0.29		2500	59	0.12	3
400	56	0.28	1	3150	64	0.24	
500	57	0.23	1	4000	69	0.35	
630	59	0.23		5000	72	0.73	

STC=58

ABBREVIATION INDEX

FREQ. = FREQUENCY, HERTZ, (cps)
T.L. = TRANSMISSION LOSS, dB
C.L. = UNCERTAINTY IN dB, FOR A 95% CONFIDENCE LIMIT
DEF. = DEFICIENCIES, dB<STC CONTOUR (SUM OF DEF = 31)
STC = SOUND TRANSMISSION CLASS

THIS ELECTRONIC COPY OF THIS REPORT IS PROVIDED AS A COURTESY BY THE
ISSUING LABORATORY FOR REFERENCE AND INFORMATIONAL PURPOSES ONLY

Tested by _____ Approved by _____

Marc Sciaky
Senior Technician

David L. Moyer
Laboratory Manager

TO BE OFFICIALLY VALID, THIS DOCUMENT MUST CONTAIN ALL SIGNATURES INDICATED

This report shall not be reproduced except in full, without the written approval of RAL.


THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.

TEST REPORT

**SOUND TRANSMISSION REPORT
RAL - TL05-013**

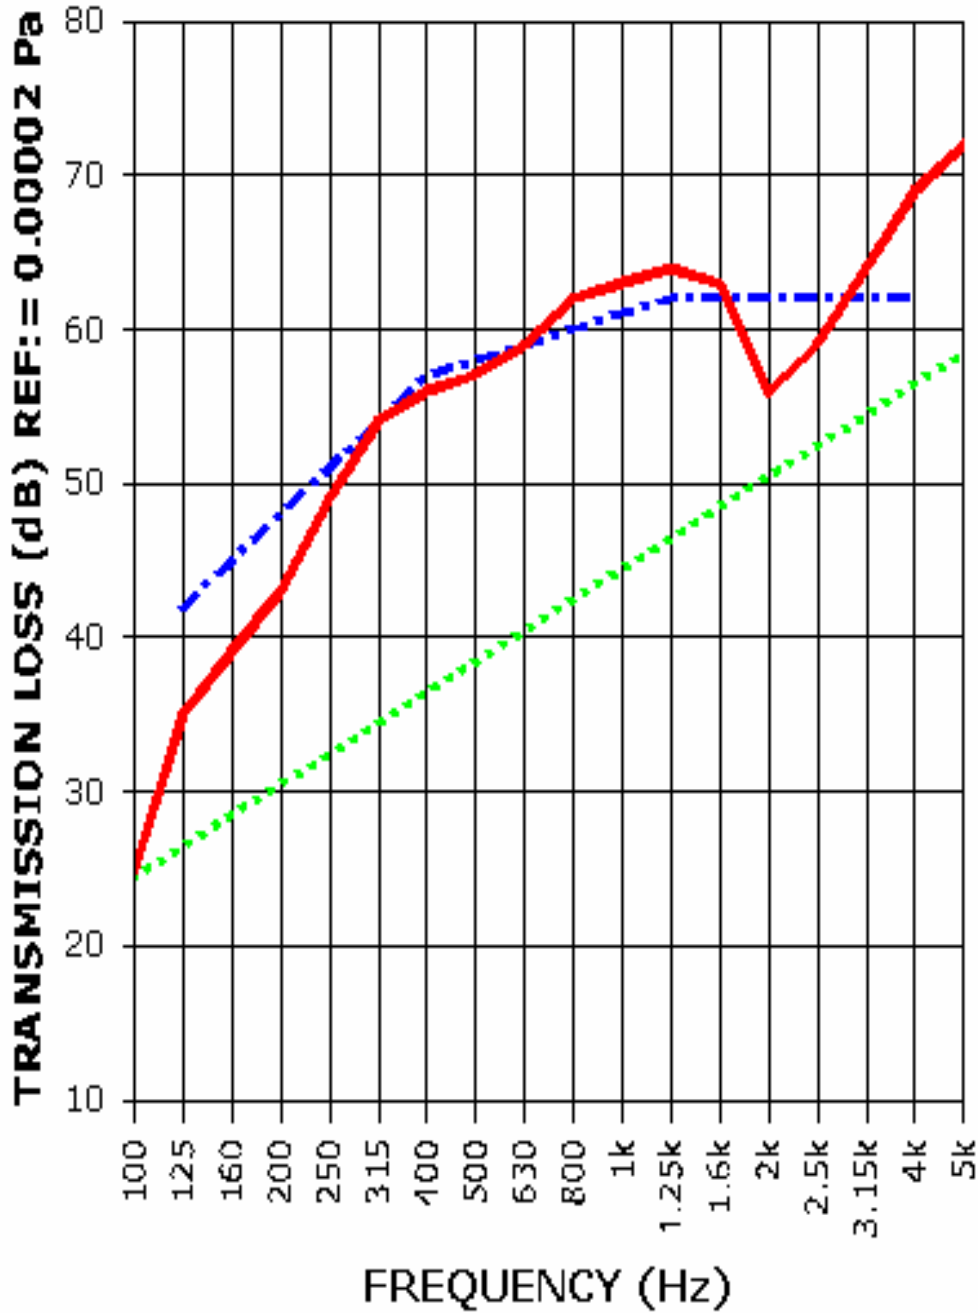

STC = 58

This report shall not be reproduced except in full, without the written approval of RAL.

THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.

FOR: PAC International, Inc.
Aloha, OR

1512 S. Batavia Avenue
Geneva, Illinois 60134-3300

ON: WS-SS-FGB-RSIC-1-GB 1 x 1

phone: 630 . 232 . 0104
fax: 630 . 232 . 0138

CONDUCTED: 19 January 2005 (Ref: TL05-013)

Page 1 of 1

SUBJECT: Outdoor Indoor Transmission Class Determination (OITC)

CLASSIFICATION

Unless otherwise designated, the Outdoor Indoor Transmission Class (OITC) determination as reported below was made with explicit conformity to the procedures described in the ASTM E1332-90 test standard. Test Method ASTM E90 was used to obtain the sound transmission loss data. This rating is based on an average transportation noise source spectrum and an A-weighted sound level reduction, either of which may be inappropriate for some applications.

One-third Octave Band Center Frequency, Hz	Reference Sound Spectrum, dB	Test Specimen Transmission Loss, dB
80	103	25
100	102	25
125	101	35
160	98	39
200	97	43
250	95	43
315	94	54
400	93	56
500	93	57
630	91	59
800	90	62
1000	89	63
1250	89	64
1600	88	63
2000	88	56
2500	87	59
3150	85	64
4000	84	69

OITC= 40

THIS ELECTRONIC COPY OF THIS REPORT IS PROVIDED AS A COURTESY BY THE
ISSUING LABORATORY FOR REFERENCE AND INFORMATIONAL PURPOSES ONLY

Calculated and Submitted by _____

David L. Moyer
Laboratory Manager

TO BE OFFICIALLY VALID, THIS DOCUMENT MUST CONTAIN ALL SIGNATURES INDICATED