

RSIC-1 ACOUSTIC ASSEMBLY

WALL ASSEMBLY




DIRECT FIX TO STEEL STUD


WS SS WEAL TL08-318 STC 56

CONSTRUCTION

- * 1 layer 5/8" Gypsum Board
- * 2.5" x 20 Ga Steel Stud at 24" oc
- * R-11 Insulation 3.5"
- * RSIC-1 48" oc.
- * Drywall Furring Channel at 24" oc
- * 1 layer 5/8" Gypsum Board

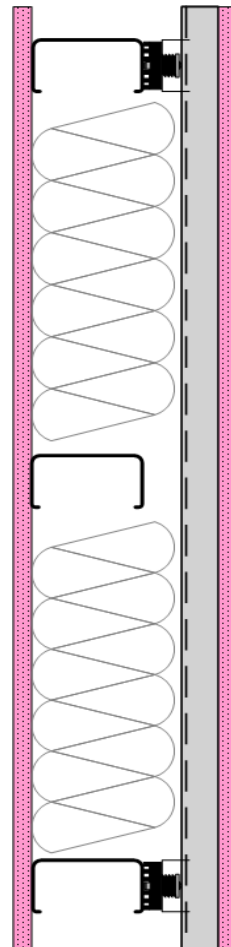

WEAL TL08-318

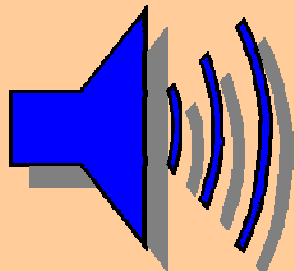

STC 56

1 hour fire rating



UL U419, U423



WESTERN ELECTRO - ACOUSTIC LABORATORY

A division of Veneklasen Associates, Inc.

TESTING • CALIBRATION • RESEARCH

25132 Rye Canyon Loop Santa Clarita, California 91355 Tel: (661) 775-3741 Fax: (661) 775-3742 www.weal.com

SOUND TRANSMISSION LOSS TEST REPORT NO. TL08-318

CLIENT: **PAC International**
7310 Smoke Ranch Road Suite E
Las Vegas, NV 89128

Page 1 of 2
30 April 2008

TEST DATE: 29 April 2008

INTRODUCTION

The methods and procedures used for this test conform to the provisions and requirements of ASTM E 90-04, *Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions*. Copies of the test standard are available at www.astm.org. The test chamber source and receiving room volumes are 204 and 148.4 cubic meters respectively. Western Electro-Acoustic Laboratory is accredited by NVLAP (National Voluntary Laboratory Accreditation Program) Lab Code 100256-0 for this test procedure. NVLAP is part of the United States Department of Commerce, National Institute of Standards and Technology (NIST). This test report relates only to the item(s) tested. Any advertising that utilizes this test report or test data must not imply product certification or endorsement by WEAL, NVLAP, NIST or the U.S. Government.

DESCRIPTION OF TEST SPECIMEN


The test specimen was a wall assembly constructed from steel studs, isolation clips, and type C gypsum board. The studs were 2-1/2 inch (63.5 mm) 20 gauge metal and were spaced 24 inches (610mm) O.C. The head and sill tracks were also 2-1/2 inch (63.5 mm) 20 gauge metal. The frame was isolated from the test opening with 1/4 inch (6.4 mm) neoprene pads. 3-1/2 inch (88.9 mm) unfaced fiberglass batts were installed in the stud spaces. On the receiving room side, one layer of 5/8 inch (15.9 mm) thick Fire Code type C gypsum board was screwed to the studs using 1-1/4 inch (31.8 mm) drywall screws at 8 inches (203 mm) O.C. around the perimeter and 12 inches (305 mm) O.C. in the field. The gypsum board was oriented vertically. On the source room side, RSIC-1 claws were screwed directly to the studs using #8 x 1-5/8 inch (41.3 mm) needlepoint wafer head screws at a vertical spacing of 24 inches (610 mm) O.C. and a horizontal spacing of 48 inches (1.22 m) O.C. 2-1/2 inch (63.5 mm) by 7/8 inch (22.2 mm) drywall furring channels were installed into the RSIC-1 claws. One layer of 5/8 inch (15.9 mm) thick Fire Code type C gypsum board was screwed to the channels using 1-1/4 inch (31.8 mm) drywall screws at 12 inches (305 mm) O.C. The gypsum board was oriented vertically. On both sides, the joints and perimeter were sealed with a bead of caulk and metal foil tape. All screw heads were covered with metal foil tape. The overall dimensions of the wall assembly were 96 inches (2.44 m) wide by 96 inches (2.44 m) high by 5-1/2 inches (140 mm) thick. The overall weight of the assembly was estimated to be 378 lbs (171 kg) for a calculated surface density of 5.91 lbs./ft² (28.8 kg/m²).

RESULTS OF THE MEASUREMENTS

One-third octave band sound transmission loss values are plotted and tabulated on the attached sheet. ASTM minimum volume requirements are met at 80 Hz and above. The Sound Transmission Class rating determined in accordance with ASTM E 413-04 was STC-56.

Approved:

Respectfully submitted,
Western Electro-Acoustic Laboratory

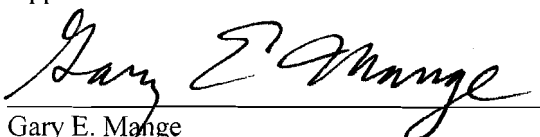
Gary E. Mange
Laboratory Manager



Raul Martinez
Acoustical Test Technician

Report must be distributed in its entirety except with written authorization from Western Electro-Acoustic Laboratory



WESTERN ELECTRO-ACOUSTIC LABORATORY

Report No. TL08-318

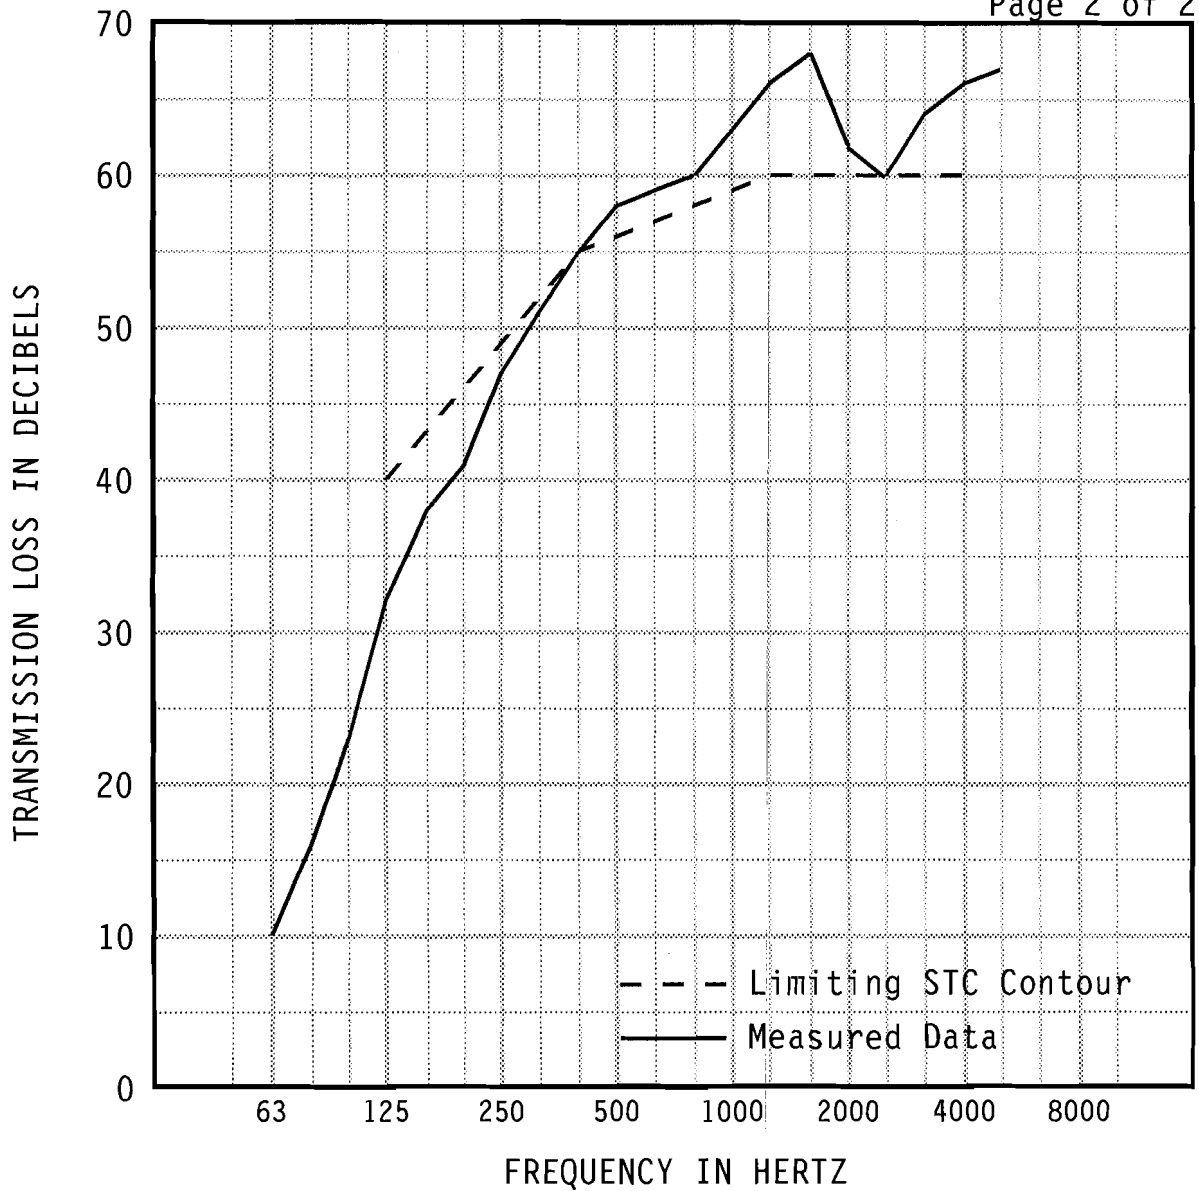

1/3 OCT BND CNTR FREQ	63	80	100	125	160	200	250	315	400	500
TL in dB	10	16	23	32	38	41	47	51	55	58
95% Confidence in dB deficiencies	1.42	1.92	2.07	1.47 (8)	0.89 (5)	0.76 (5)	0.80 (2)	0.52 (1)	0.36 (0)	0.38
1/3 OCT BND CNTR FREQ	630	800	1000	1250	1600	2000	2500	3150	4000	5000
TL in dB	59	60	63	66	68	62	60	64	66	67
95% Confidence in dB deficiencies	0.29	0.44	0.38	0.39	0.36	0.56	0.55 (0)	0.31	0.32	0.50

EWR	OITC	Specimen Area: 64 sq.ft. Temperature: 73.4 deg. F Relative Humidity: 32 % Test Date: 29 April 2008	STC
56	34		56
			(21)

Report must be distributed in its entirety except with written authorization from Western Electro-Acoustic Laboratory