



RSIC-DC04X2

The **RSIC-DC04X2®** are very versatile products. The most common use is the decoupling of wall systems, isolating ceilings, and mechanical vibration control. The design of the RSIC-DC04X2® can be used in new construction or retrofit. Below are some examples of the possible uses for the RSIC-DC04X2® .




- Dropped Ceiling
- Garage Door Motor Isolation
- Garage Door Rail Isolation
- Decoupled connector for isolating walls built within another wall
- Speaker Isolators
- Vent Fan Isolators
- Recessed Lighting Isolators
- Projector Mount Isolators
- Electrical Box or Ceiling Fan Isolators

Wood
Steel
Metal Deck

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms


Recording Studio
Home Theater
Commercial theater

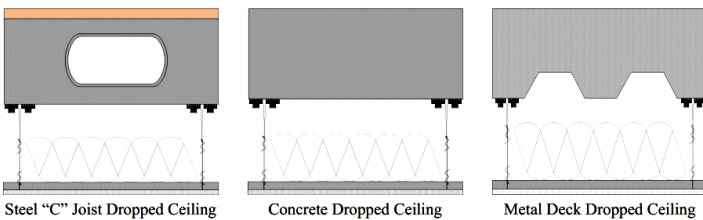

Steel "C" Joist Dropped Ceiling

Concrete Dropped Ceiling

Metal Deck Dropped Ceiling

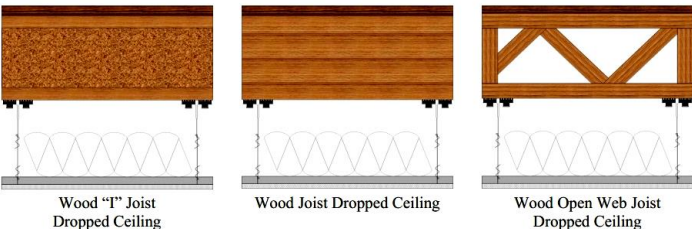

Wood "I" Joist Dropped Ceiling

Wood Joist Dropped Ceiling

Wood Open Web Joist Dropped Ceiling

RSIC-DC04X2 specifications:

Made in the USA	YES
Acoustical design load:	72 lbs
Total deflection	3 mm
Double deflection	YES
Made with Recycled content	YES
Cryo low VOC treated	YES
Adjustable	YES
Cavity min	4-1/2"
Cavity Max	Var.
Adjustment limit	Var.
Use on Ceilings	YES
Use on walls	YES
New Construction	YES
Retro Fit	YES