


RSIC-V CLIP ACOUSTIC ASSEMBLY


WALL ASSEMBLY

DIRECT FIX TO WOOD STUD

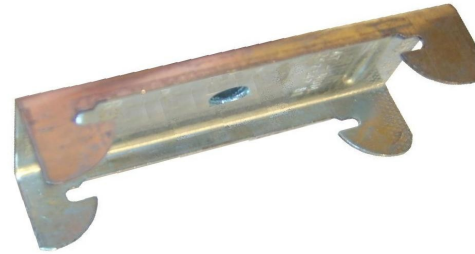

PAC INTERNATIONAL INC.
TOLL FREE 866-RSIC-100
WWW.PAC-INTL.COM

WEAL 06-505 Assembly STC 62




STC 62

CONSTRUCTION

- * 2 Layers 5/8" Gypsum
- * 7/8" x 25 gauge furring Channel @ 24" o.c.
- * RSIC-V clips at 48" o.c.
- * 2x4 wood studs @ 16" o.c.
- * 5.5" unfaced fiberglass insulation
- * 2 Layers 5/8" Gypsum

- * Test Number TL06-505
- * UL U305

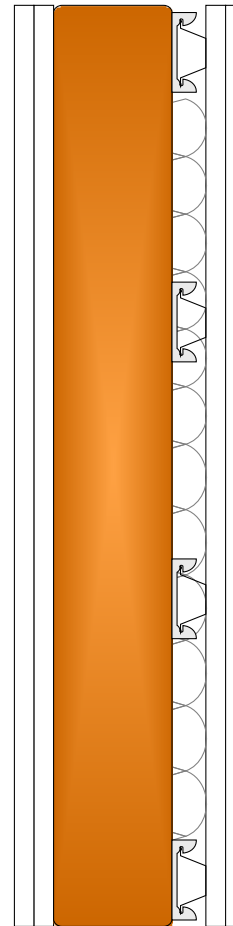

1 HOUR

**SOUND
TRANSMISSION
CLASS**

STC 62



WESTERN ELECTRO - ACOUSTIC LABORATORY

A division of Veneklasen Associates, Inc.

T E S T I N G • C A L I B R A T I O N • R E S E A R C H

25132 Rye Canyon Loop Santa Clarita, California 91355 Tel: (661) 775-3741 Fax: (661) 775-3742 www.weal.com

SOUND TRANSMISSION LOSS TEST REPORT NO. TL06-505

CLIENT: **PAC International**
2620 Regatta Drive, Suite #102
Las Vegas, NV 89128-6892

Page 1 of 2
8 January 2007

TEST DATE: 14 December 2006

INTRODUCTION

The methods and procedures used for this test conform to the provisions and requirements of ASTM E 90-04, *Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions*. Copies of the test standard are available at www.astm.org. The test chamber source and receiving room volumes are 204 and 148.4 cubic meters respectively. Western Electro-Acoustic Laboratory is accredited by NVLAP (National Voluntary Laboratory Accreditation Program) Lab Code 100256-0 for this test procedure. NVLAP is part of the United States Department of Commerce, National Institute of Standards and Technology (NIST). This test report relates only to the item(s) tested. Any advertising that utilizes this test report or test data must not imply product certification or endorsement by WEAL, NVLAP, NIST or the U.S. Government.

DESCRIPTION OF TEST SPECIMEN

The test specimen was a wall assembly constructed from wood studs and Firecode "C" gypsum board. In this report, all wood stud dimensions are nominal. The frame used a single 2 x 4 wood head and sill plate and 2 x 4 wood studs at 16 inches (406 mm) O.C. 6 inch (152 mm) unfaced R-19 fiberglass batts were installed in the stud spaces. On the receiving room side, two layers of 5/8 inch (15.9 mm) thick Firecode "C" gypsum board were screwed to the studs. The first layer was oriented vertically and screwed using 1-1/4 inch (31.8 mm) screws at 12 inches (305 mm) O.C. around the perimeter and in the field. The second layer was oriented horizontally and screwed using 1-5/8 inch (41.3 mm) screws at 12 inches (305 mm) O.C. around the perimeter and in the field. On the source room side, RSIC-V claws were screwed directly to the studs using 1-1/2 inch (38.1 mm) screws at a vertical spacing of 24 inches (610 mm) O.C. and at a staggered horizontal spacing of 48 inches (1.22 m) O.C. 2-1/2 inch (63.5 mm) by 7/8 inch (22.2 mm) drywall furring channels were installed into the RSIC-V claws. Two layers of 5/8 inch (15.9 mm) thick Firecode "C" gypsum board was screwed to the channels. The first layer was oriented vertically and screwed using 1-1/4 inch (31.8 mm) screws at 12 inches (305 mm) O.C. The second layer was oriented horizontally and screwed using 1-5/8 inch (41.3 mm) screws at 12 inches (305 mm) O.C. On both sides, the joints and perimeter were taped. All screw heads were covered. The overall dimensions of the wall assembly were 96 inches (2.44 m) wide by 96 inches (2.44 m) high by 7-1/8 inches (181 mm) thick. The overall weight of the assembly was estimated to be 776 lbs (352 kg) for a calculated surface density of 12.1 lbs./ft² (59.2 kg/m²).

RESULTS OF THE MEASUREMENTS

One-third octave band sound transmission loss values are plotted and tabulated on the attached sheet. ASTM minimum volume requirements are met at 80 Hz and above. The Sound Transmission Class rating determined in accordance with ASTM E 413-04 was STC-62.

Respectfully submitted,
Western Electro-Acoustic Laboratory

Gary E. Mange
Laboratory Director


Report must be distributed in its entirety except with written authorization from Western Electro-Acoustic Laboratory



NVLAP LAB CODE 100256-0

WESTERN ELECTRO-ACOUSTIC LABORATORY

Report No. TL06-505

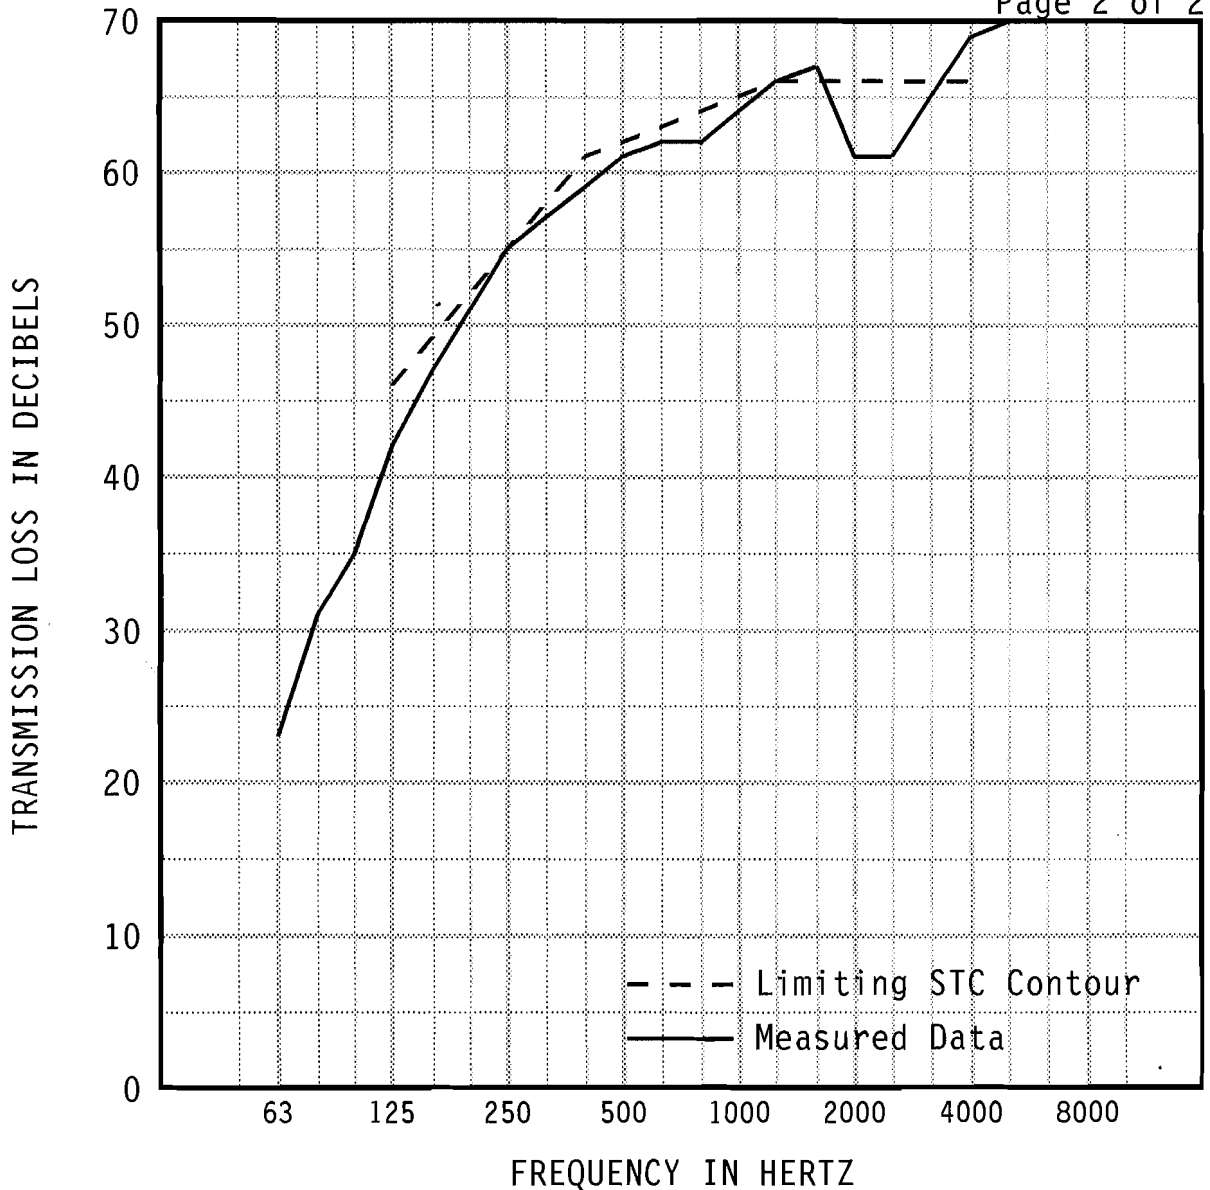

1/3 OCT BND CNTR	FREQ	63	80	100	125	160	200	250	315	400	500
TL in dB		23	31	35	42	47	*51	*55	*57	*59	*61
95% Confidence in dB deficiencies		1.42	1.92	2.07	1.47	0.89	0.76	0.80	0.52	0.36	0.38
					(4)	(2)	(1)	(0)	(1)	(2)	(1)
1/3 OCT BND CNTR	FREQ	630	800	1000	1250	1600	2000	2500	3150	4000	5000
TL in dB		62	62	64	66	67	61	61	65	69	70
95% Confidence in dB deficiencies		0.29	0.44	0.38	0.39	0.36	0.56	0.55	0.31	0.32	0.50
		(1)	(2)	(1)	(0)		(5)	(5)	(1)		

EWR 63	OITC 47	* Minimum estimate of transmission loss. Measurement limited by filler wall. Actual TL will be equal to or greater than value reported.	STC 62 (26)
Specimen Area: 64 sq.ft. Temperature: 72.5 deg. F Relative Humidity: 49 % Test Date: 14 December 2006			

Report must be distributed in its entirety except with written authorization from Western Electro-Acoustic Laboratory

