




RSIC-1 ADM Side Mount



The **RSIC-1-ADM Side Mount** clip designed for use with open web steel truss applications where noise control is required. The RSIC-1-ADM Side Mount isolator is a labor saving adjustable mount for steel truss. Hammer on the clip and spin the isolator to adjust up and down for a level ceiling. Secure the side mount with two strands of 18 Ga wire. With an Acoustical design load rating of 36 lbs per isolator, the RSIC-1-ADM Side Mount clip can support up to two layers of 5/8" gypsum board when spaced at 24" x 48" oc., and 3 layers when spaced at 16" x 48" oc. The RSIC-1-ADM Side Mount clip attaches directly to the side of the steel truss decoupling the gypsum board from the structure stopping STC and IIC vibrations from entering the space below.


RSIC-1, the Low Cost, High Performance, Noise control Solution

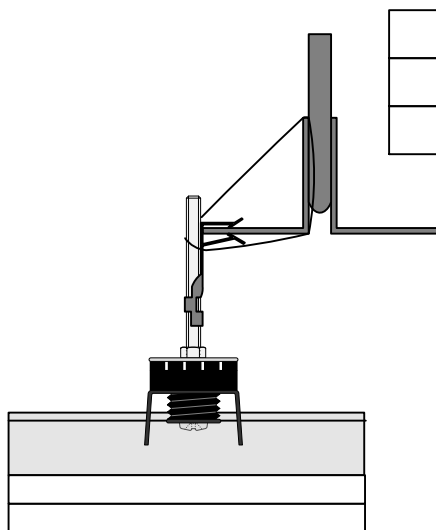

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

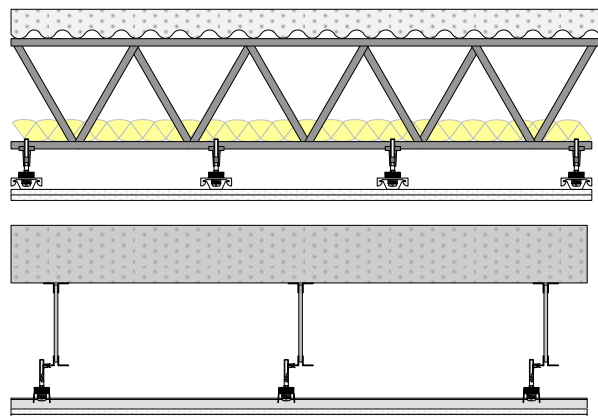

RSIC-1-ADM Side Mount specifications:

Acoustical design load:	36 Lbs
Total deflection	3 mm
Double deflection	Yes (1.5 mm)
Made with Recycled content	Yes
Cryo low VOC treated	Yes
Adjustable	Yes
Cavity min	1-3/4"
Cavity Max	Up to 12"
Adjustment limit	Threaded Rod
Use on Ceilings	Yes
Use on walls	No
New Construction	Yes
Retro Fit	Yes